

**2022 IEEE 3rd KhPI Week
on Advanced Technology
(KhPI Week)**



**CONFERENCE
PROCEEDINGS**



October 03 - 07, 2022

Kharkiv, Ukraine

2022 IEEE 3rd KhPI Week on Advanced Technology (KhPI Week)

**Copyright © 2022 by the Institute of Electrical and Electronics Engineers, Inc.
All rights reserved.**

Copyright and Reprint Permission

Copyright and Reprint Permission: Abstracting is permitted with credit to the source. Libraries are permitted to photocopy beyond the limit of U.S. copyright law for private use of patrons those articles in this volume that carry a code at the bottom of the first page, provided the per-copy fee indicated in the code is paid through Copyright Clearance Center, 222 Rosewood Drive, Danvers, MA 01923. For reprint or republication permission, email to IEEE Copyrights Manager at pubs-permissions@ieee.org.

All rights reserved. Copyright © 2022 by IEEE.

**IEEE Catalog Number: CFP22Z72-ART
ISBN: 979-8-3503-9920-2**

Organizing Committee of 2022 IEEE KhPIWeek
Work phone: +38 (057) 707-66-34
E-mail: khpiweek@ieee.org.ua
National Technical University “Kharkiv Polytechnic Institute”
Kyrpychova Str. 2
61000, Kharkiv, Ukraine

ORGANIZERS



SPONSORS



IEEE Ukraine Section EMB Chapter

IEEE Ukraine Section PE/IE/IA Joint Chapter

IEEE Ukraine Section IE/PE/PEL Joint Chapter

IEEE Ukraine Section NANO Chapter

ORGANIZING COMMITTEE

Honorary Chairman

Yevgen Sokol Dr.Sc, National Technical University “Kharkiv Polytechnic Institute”
(Kharkiv, Ukraine)

Chair

Roman Zaitsev Dr.Sc, National Technical University “Kharkiv Polytechnic Institute”
(Kharkiv, Ukraine)

Technical Program Committee Chair

Mykhailo Kirichenko PhD, National Technical University “Kharkiv Polytechnic Institute”
(Kharkiv, Ukraine)

Technical Program Committee Members

Bohdan Vorobiov PhD, National Technical University “Kharkiv Polytechnic Institute”
(Kharkiv, Ukraine)

Dmytro Danylchenko PhD, National Technical University “Kharkiv Polytechnic Institute”
(Kharkiv, Ukraine)

Mykhailo Shyshkin PhD, National Technical University “Kharkiv Polytechnic Institute”
(Kharkiv, Ukraine)

Alexander Zakovorotniy Dr.Sc, National Technical University “Kharkiv Polytechnic Institute”
(Kharkiv, Ukraine)

Roman Tomashevskiy Dr.Sc, National Technical University “Kharkiv Polytechnic Institute”
(Kharkiv, Ukraine)

Oleksiy Larin Dr.Sc, National Technical University “Kharkiv Polytechnic Institute”
(Kharkiv, Ukraine)

Publication Chair

Kseniia Minakova PhD, National Technical University “Kharkiv Polytechnic Institute”
(Kharkiv, Ukraine)

Financial Chair

Vadym Makarov PhD, National Technical University “Kharkiv Polytechnic Institute”
(Kharkiv, Ukraine)

REVIEWERS LIST

Oleksandr Andreev
Olga Andreeva
Petro Andrienko
Olena Avdieieva
Oleh Avrunin
Olesia Barkovska
Sergey Berezka
Olena Bibik
Sergey Bulba
Serhii Buryakovskiy
Victor Busher
Victor Chelak
Oleksii Chorny
Dmytro Chumachenko
Dmytro Danylchenko
Andrii Dobrozhan
Stanislav Dryvetskyi
Stanislav Fedorchuk
Anna Filatova
Svetlana Gavrilenko
Boris Gorkunov
Iryna Halushchak
Volodymyr Ivakhno
Mykhailo Kirichenko
Volodymyr Klepikov
Konstantin Kolisnyk
Bohdan Kopchak
Andrii Kopp
Tetyana Korenkova
Vladimir Kotlyarov
Mykhailo Kotsur

Andriy Kovalenko
Serhii Kovbasa
Olga Kozina
Mariia Kozulia
Georgiy Kuchuk
Nina Kuchuk
Viacheslav Kulichenko
Tetiana Kunchenko
Andriy Kutsyk
Borys Kuznetsov
Oleksiy Larin
Denys Lavinskiy
Sergey Leonov
Olena Lyubchenko
Kostiantyn Makhotilo
Vitalii Martovytskyi
Nickolay Mezentsev
Yuriy Mikhlin
Kseniia Minakova
Oleksandr Mirosnyk
Andriy Okhrimovskyy
Ihor Orlovskiy
Mykola Ostroverkhov
Yaroslav Paranchuk
Sergei Peresada
Andrii Pirozhok
Andrii Podorozhniak
Anatoly Povoroznjuk
Anatoliy Prystupa
Dmytro Pshenychnykov
Olena Rubanenko

Oleksandr Sadovoi
Alla Savchenko
Vira Shamardina
Ihor Shchur
Tetiana Shelest
Oleksii Sheremet
Serhii Shevchenko
Larysa Shylkova
Mykhailo Shyshkin
Oleg Sinchuk
Dmytro Snizhko
Serhii Stepenko
Yana Suchikova
Tetiana Tavrina
Mykola Tkachuk
Olga Tolocho
Oleksandr Trushin
Valerii Tytjuk
Vladimir Vodichev
Olga Vodoriz
Yurii Voitovych
Grinchenko Volodymyr
Bohdan Vorobiov
Walery Yagup
Roman Yershov
Iurii Zachepa
Roman Zaitsev
Volodymyr Zamaruiev
Yuriy Zholudov

Investigation of Reliability of Emergency Shutdown of Consumers in Electric Power Systems of Explosive Hazardous Zones

Oleg Kulakov

Scientific Department on Problems of Civil Protection and Technogenic and Ecological Safety
National University of Civil Defence of Ukraine
Kharkiv, Ukraine
olegkov1963@gmail.com

Maksym Kustov

Scientific Department on Problems of Civil Protection and Technogenic and Ecological Safety
National University of Civil Defence of Ukraine
Kharkiv, Ukraine
kustov_m@nuczu.edu.ua

Serhii Rudakov

Department of Fire Prevention in Settlements
National University of Civil Defence of Ukraine
Kharkiv, Ukraine
serg_266@ukr.net

Albert Katunin

Department of fire and technological safety of facilities and technologies
National University of Civil Defence of Ukraine
Kharkiv, Ukraine
lightsymbol@gmail.com

Evgen Slepuzhnikov

Department of Special Chemistry and Chemical Technology
National University of Civil Defence of Ukraine
Kharkiv, Ukraine
slepuzhnikov@nuczu.edu.ua

Abstract—The dependence of reliability of emergency shutdown of consumers in electric power systems of explosive hazardous zones on such parameters of electric network as nominal currents of electromagnetic declutch of circuit breaker and fusible fuse insert, approximate calculated impedance of transformer, material, cross - section and length of cable. The obtained results will prevent the appearance of ignition sources of electrical origin during the operation of consumers in electric power systems of explosive hazardous zones

Keywords—power system, emergency mode, short circuit, explosive hazardous zone, circuit breaker, fuse, current multiplicity

I. INTRODUCTION

The data of world fire statistics, published annually by the Center for Fire Statistics of the International Association of Fire and Rescue Services (CTIF) [1], give reason to believe that quite often fires occur due to violations of fire safety rules during installation and operation of electrical installations. In particular, in Ukraine, according to [2], this cause is the second most common (up to 20% annually of their total number). Up to 60% of fires due to violation of fire safety rules during the installation and operation of electrical installations leads to a short circuit (SC) of the electrical network.

Consumers of electric power systems located in explosive hazardous zones (EHZ) are especially dangerous. In this case, the main components of the fire are usually located nearby – the source of ignition and combustible substance [3, 4]. Each fire causes a number of hazardous factors, such as heat, hazardous combustion products and the blast wave [5]. The consequences of fires in EHZ are extremely resonant compared to normal conditions. Hazard assessment of facilities is an

integral part of the industrial safety system. Mistakes in this area can cause harm to the environment, increase complexity [6]. Such events can lead to large-scale emissions of hazardous chemicals [7]. Fires can trigger acid rain [8] and pollute aquifers [9]. The largest fire during the independence of Ukraine, which led to significant human and material losses, was a fire on June 8, 2015 on one of the fuel tanks in the oil depot of the group of companies "BRSM-Nafta" in the Kryachky village, Vasytkiv district, Kyiv region, killed five people, including three rescuers, and 16 were injured. The fire lasted for two weeks. The cause of the fire was a lack of construction and production of electrical installations, resulting in a SC in a mobile pumping unit located in the EHZ. The consequences of such fires are increasingly forcing us to focus on the development and improvement of fire extinguishing technologies [10, 11]. However, the most effective way to increase fire safety is to prevent fires and fires.

To ensure the safe operation of electrical equipment of power systems in EHZ, a number of enhanced engineering and technical measures are used [12]. In order to prevent the explosion of an external explosive environment, the shells of electrical equipment are made with explosion protection, which must correspond to the class of the EHZ. In order to prevent the spread of fire and to prevent external damage, cable productions (CP) are selected of special brands also depending on the class of the EHZ. In most EHZ, the use of CP with aluminum elements in the structure is prohibited. In order to ensure electrical strength, the cross-section of the cores of CP is chosen to be increased by 25% compared to the calculated values. Emergency shutdown of electrical consumers in the EHZ is arranged with special requirements compared to normal operating conditions.

Therefore, in particular, the problem of ensuring the reliability of emergency shutdown of consumers of power systems located in EHZ is relevant.

II. ANALYSIS OF DANGER OF CONSUMER WORK IN ELECTRIC POWER SYSTEMS OF EXPLOSION HAZARDOUS ZONES

By power system we mean the electrical part of the power system and the receivers of electricity supplied from it, united by a common process of production, transmission, distribution and consumption of electricity. Electricity consumer – a receiver or group of receivers of electricity, combined with the technological process, which are located in a certain area [13]. Consumers of electric power systems located in EHZ are especially dangerous. The authors consider an experimental study of the fire process for different rooms and materials [14].

EHZ – hazardous area classification based on the frequency of the occurrence and duration of the explosive atmosphere. Hazardous area – area in which an explosive gas atmosphere (EGA) is present or can be expected to be present, in quantities such that special precautions for the construction, installation and use of equipment are required [12, 15, 16]. EGA can form EHZ of three classes: zone 0 (area in which an EGA is present continuously, or for long periods, or frequently), zone 1 (area in which an EGA is likely to occur occasionally in normal operation), zone 2 (area in which an EGA is not likely to occur in normal operation, but, if it does occur, will exist for a short period only) [12, 15]. Explosive dust atmospheres (EDA) similarly form EHZ of three classes: zone 20 (a place in which an EDA, in the form of a cloud of dust in air, is present continuously, or for long periods or frequently), zone 21 (a place in which an EDA, in the form of a cloud of dust in air, is likely to occur in normal operation occasionally), zone 22 (area in which an EDA, in the form of a cloud of combustible dust in air, is not likely to occur in normal operation but, if it does occur, will persist for a short period only) [12, 16]. It should be noted the difference between European and North American approaches to the establishment of classes and sizes of EHZ [17]. The gas environment of premises under conditions of danger is a complex system with a dissipative structure, non-linear dynamics, and self-organization [18].

A typical emergency mode of operation of the power system is the appearance of overcurrent – current, the value of which exceeds the largest operating (estimated) value of the electric circuit current. Most often, overcurrents are caused by SC – contact formed between several current-carrying parts, which is accompanied by a decrease in the potential difference between these parts to zero or a value close to zero [14, 19]. The study and modeling of the conditions of occurrence and development of SC in power systems is devoted, in particular, work [20-22]. If the time of action of the overcurrent in the electric network of the electric power system is not limited, the temperature of the current-carrying cores of the conductors increases and an ignition source of electric origin appears [23]. Automatic fire protection systems can be used for early detection of temperature rise [24], the most common sensitive

elements of which are temperature control sensors [25]. Different methods of statistical data processing are used for early forecasting of emergency situations in electric power systems [26].

The appearance of an ignition source in EHZ instantly leads to an explosion [25].

Any electrical network in its entirety or its emergency part must be switched off within a certain period of time if it may pose a threat to property or the health of people and domestic animals. To protect the electrical network from overcurrents are used protection devices: circuit breakers, fuses, combinations of switching devices with thermal relays and fuses, specialized electronic devices.

III. INVESTIGATION OF RELIABILITY OF EMERGENCY DISCONNECTION OF CONSUMERS IN ELECTRIC POWER SYSTEMS OF EXPLOSION ZONES

A. Conditions for ensuring reliability

To ensure the reliability of disconnection of consumers in the power systems of EHZ from power sources in the event of a SC is normalized multiplicity (ratio) of SC currents to rated currents of sensitive elements of protection devices [12, 27]. Reliable disconnection of the damaged part of the network is provided if the ratio of the lowest rated SC current to the rated current $I_{r.c.-net}$ of the solenoid circuit breaker or the rated fuse current $I_{r.c.-fuse}$ of the fuse is not less than the following value:

- for circuit breakers with electromagnetic release:

$$\frac{I_{SC}}{I_{r.c.-net}} \geq 1,25(1,4), \quad (1)$$

where I_{SC} – SC current;

coefficient 1,25 – for circuit breakers for rated currents above 100 A;

coefficient 1,4 – for circuit breakers for rated currents up to 100 A;

– for fuses:

$$\frac{I_{SC}}{I_{r.c.-fuse}} \geq 4. \quad (2)$$

B. Derivation of mathematical relations

We believe that the electrical network of the power system located in the EHZ will be reliably disconnected in the event of an emergency mode in the form of a SC under conditions (1) and (2). Accordingly, if conditions (1) and (2) are not met, the electrical network will not be disconnected in the event of an emergency mode in the form of a SC.

We assume that the EHZ electrical network is made with the type of grounding TN-S [12, 19]. Consider the case of a single-phase SC. The calculation of SC current I_{SC} is performed according to Ohm's law:

$$I_{SC} = \frac{U_L}{Z_{SC}}, \quad (3)$$

where U_L – phase voltage in the network, B;

Z_{SC} – impedance of series-connected circuit elements of single-phase SC, Ohm.

To establish the value Z_{SC} , we use the simplest calculation scheme of a single-phase SC (Fig. 1).




Fig. 1. Calculation scheme of a single-phase short circuit

Formula (3) will take the form:

$$I_{SC} = \frac{U_L}{Z_{SC}} = \frac{U_L}{\frac{Z_T}{3} + Z_L + Z_N}, \quad (4)$$

where Z_T – approximate calculated impedance of a three-phase transformer of the power system, Ohm, Z_T depends on the power of the transformer and the connection scheme of its windings;

$Z_L = R_L + j \cdot X_L$ – impedance of a linear conductor, Ohm;

$Z_N = R_N + j \cdot X_N$ – impedance of the neutral conductor, Ohm;

R_L – active resistance of a linear conductor, Ohm;

X_L – inductive resistance of a linear conductor, Ohm;

R_N – active resistance of the neutral conductor, Ohm;

X_N – inductive resistance of the neutral conductor, Ohm.

After the transformation we get:

$$Z_{SC} = Z + \frac{Z_T}{3}, \quad (5)$$

where

$$Z = \sqrt{R^2 + X^2}, \quad (6)$$

– impedance of SC conductors connected to the transformer winding;

$$R = \sum R_L + \sum R_N + \sum R_K, \quad (7)$$

$$X = \sum X_L + \sum X_N, \quad (8)$$

$R_L = \rho_L \cdot \frac{\ell}{S_L}$; $X_L = a_L \cdot \ell$ – active and inductive resistance of the linear conductor, respectively, Ohm;

$R_N = \rho_N \cdot \frac{\ell}{S_N}$; $X_N = a_N \cdot \ell$ – active and inductive resistance

of the neutral conductor, respectively, Ohm;

S_L and S_N – the cross section of the cores of linear and neutral conductors, respectively, mm²;

ρ – resistance of the conductor material, Ohm·mm²/km;

ℓ – the length of the section with the same cross-section of the cores and the same brand of conductor, km;

a_L , a_N – the average value of the inductive resistance of the conductor, Ohm·km;

R_K – transient resistance of contact connections, Ohm.

C. Analysis of the obtained relations

The fulfillment of conditions (1) and (2) is influenced by the following parameters: rated current $I_{r.c.-net}$ electromagnetic circuit breaker, rated current $I_{r.c.-fuse}$ fuse insert, approximate calculated impedance Z_T three-phase transformer, material, cross section and length of conductors of CP electrical network.

The value of $I_{r.c.-net}$ and $I_{r.c.-fuse}$ are standard values.

Their recommended values are multiples of 10: 0.6; 0.8; 1; 1.25; 1.6; 2; 2.5; 3.2; 4; 5; 6.3; 8; 10 [28, 29]. For the standard value $U_L = 220$ V [30] the impedance of the series-connected elements of the SC Z_{SC} for circuit breakers with release

$I_{r.c.-net} \leq 100$ A must not exceed the following values: $I_{r.c.-net} = 6$ A – $Z_{SC} \leq 26,190$ Ohm, 8 A –

19,643 Ohm, 10 A – 15,714 Ohm, 12,5 A – 12,571 Ohm, 16 A – 9,821 Ohm, 20 A – 7,827 Ohm, 25 A – 6,286 Ohm, 32 A – 4,911 Ohm, 40 A – 3,929 Ohm, 50 A – 3,143 Ohm, 63 A – 2,194 Ohm, 80 A – 1,964 Ohm, 100 A – 1,571 Ohm in accordance. For fusible inserts with $I_{r.c.-fuse} \leq 100$ A fuses,

the impedance of the series-connected circuit elements of the SC Z_{SC} should not exceed the following values:

$I_{r.c.-fuse} = 6$ A – $Z_{SC} \leq 9,167$ Ohm, 8 A – 6,875 Ohm, 10 A – 5,500 Ohm, 12,5 A – 4,400 Ohm, 16 A – 3,438 Ohm, 20 A – 2,750 Ohm, 25 A – 2,200 Ohm, 32 A – 1,719 Ohm, 40 A – 1,375 Ohm, 50 A – 1,100 Ohm, 63 A – 0,873 Ohm, 80 A – 0,688 Ohm, 100 A – 0,550 Ohm in accordance.

The first component of the impedance Z_{SC} of the series-connected circuit elements of a single-phase SC is the approximate calculated impedance Z_T of a three-phase oil SC current transformer. Z_T values are fixed in the range from 0,020 to 3,110 Ohm [31]. The approximate calculated impedance Z_T has a significant effect on the value of the impedance Z_{SC} series-connected circuit elements of a single-phase SC, if their values are comparable. This is the case if a circuit breaker with an electromagnetic release from 40 A to 100 A is used for SC protection and if a fuse with fusible inserts from 10 A to 100 A is used for SC protection. For

example, if a circuit breaker is used with $I_{r.c.-net.} = 6 \text{ A}$, then the value is the maximum allowable $Z_{SC} = 26,190 \text{ Ohm}$. The maximum value of the estimated impedance $Z_T = 3,110 \text{ Ohm}$. Then $\frac{Z_T}{3} = \frac{3,110}{3} \approx 1,037 \text{ Ohm}$ and therefore this impedance will not have a significant effect on the final value Z_{SC} . If a circuit breaker is used with $I_{r.c.-net.} = 100 \text{ A}$, then the maximum allowable value is already $Z_{SC} = 1,572 \text{ Ohm}$. The maximum possible value $\frac{Z_T}{3} = \frac{3,110}{3} \approx 1,037 \text{ Ohm}$ will affect the final value Z_{SC} .

The second component of Z_{SC} is the impedance Z of the conductors of the SC connected to the transformer winding, which is determined by the active and inductive resistances of the linear and neutral conductors of the selected CP and the number and quality of contact connections. Active resistance depends on the material, cross section and length of the conductor, inductive resistance – on the length of the conductor and the type of CP (cable or wire).

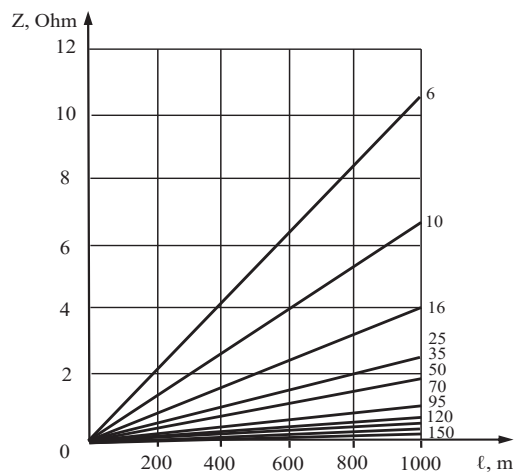


Fig. 2. Dependences of the impedance Z of two cores of a segment of a cable with aluminum cores of various sections on cable length l

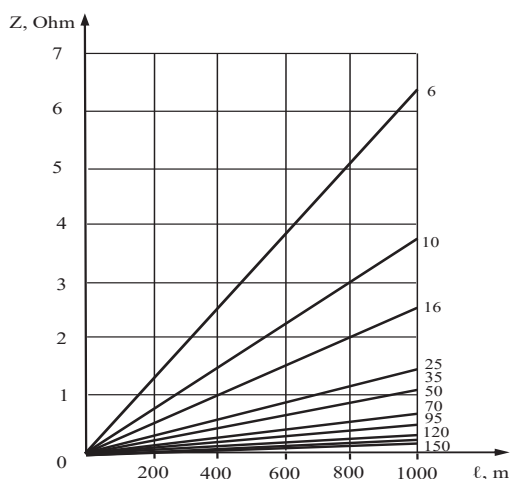


Fig. 3. Dependences of the impedance Z of two cores of a cable segment with copper cores of different cross sections on the cable length l

In the general case, the SC current flows through the mains, distribution network and group network. Aluminum conductors are prohibited for use in zone 0, 1, 2, 20, 21 [12, 27]. Therefore, distribution and group networks are made of CP copper cores. The use of CP with both aluminum and copper cores is allowed in the power supply network. Fig. 2 shows the dependence of the impedance Z of the segment of the cable with aluminum cores of standard cross-sections on its length, and Fig. 3 – for the cable with copper cores, respectively (cross-section of the cores taken from tables [32]).

IV. DISCUSSIONS

Studies have shown that the reliability of disconnection of consumers in the power systems of EHZ from power sources in the event of a SC is influenced by the following parameters: rated current of the solenoid circuit breaker $I_{r.c.-net}$, rated current of the fuse insert $I_{r.c.-fuse}$, approximate calculated impedance Z_T of a three-phase transformer, material, cross-section and length of conductors of CP of the electrical network.

Analysis of formulas (1) - (2) shows that the lower the rated current $I_{r.c.-net}$ of the electromagnetic release of the circuit breaker or the rated current $I_{r.c.-fuse}$ of the fuse insert, the greater the allowable value of the impedance Z_{SC} series-connected circuit elements single-phase SC. When choosing a circuit breaker as a SC protection device, the value of the impedance of the Z_{SC} series-connected circuit elements of a single-phase SC is assumed to be much higher in comparison with the use of a fuse.

From formulas (1) - (5) it follows that for fuses the approximate rated impedance of a three-phase oil transformer Z_T affects the value of the impedance of the SC between the linear and neutral conductors Z_{SC} starting with a fuse current of 10 A, and for circuit breakers with electromagnetic release – from the current of the release 40 A.

From formulas (1) - (8) and the dependences shown in Fig.2 and Fig.3 it is seen that the greatest contribution to the impedance Z of the conductors of the SC connected to the transformer winding is the resistance of the power supply made of aluminum conductors.

The disadvantage of this algorithm is that the criterion of reliability of disconnection of consumers in the power systems of EHZ from power sources in the event of a SC is the multiplicity (ratio) of SC currents to rated currents of sensitive elements of protection devices [16, 27]. It is advisable to consider the time of disconnection of SC currents as sensitive elements of protection devices, which should not exceed the safest time of the ignition source of electrical origin "thermal action of SC currents" [23].

V. CONCLUSIONS

The reliability of emergency shutdown of consumers in the power systems of EHZ is ensured if the multiplicity (ratio) of

the lowest rated SC current to the rated current of the circuit breaker or fuse-link will be not less than a certain value.

Studies have shown that the lower the rated current of the solenoid circuit breaker or the rated current of the fuse link, the greater the assumed value of the impedance of the series-connected circuit elements of a single-phase SC. When choosing a circuit breaker protection device, the value of this impedance is assumed to be much higher compared to the use of a fuse. The approximate calculated impedance of the oil transformer significantly affects the value of the impedance of the single-phase SC starting from the current of the electromagnetic release 40 A or the current of the fusible insert 10 A. The impedance of the SC conductors connected to the transformer winding and the number and quality of contact connections. Active resistance depends on the material, cross section and length of the linear conductor, inductive resistance – on the length of the conductor and the type of selected CP. The greatest contribution to the impedance is made by the resistance of aluminum conductors of the power supply network.

REFERENCES

- [1] International association of fire and rescue services (CTIF). URL: <https://ctif.org/ctif-international-association-fire-rescue-services>.
- [2] Statistics of fires // Institute of Public Administration and Civil Protection Research. URL: <https://idundecz.dsns.gov.ua/ua/Analitichni-materiali.html>.
- [3] B. Pospelov, V. Andronov, E. Rybka, V. Popov, and A. Romin, "Experimental study of the fluctuations of gas medium parameters as early signs of fire," *Eastern-European Journal of Enterprise Technologies*, vol. 1, issue 10 (91), 2018, pp. 50–55.
- [4] B. Pospelov, V. Andronov, E. Rybka, and S. Skliarov, "Design of fire detectors capable of self-adjusting by ignition," *Eastern-European Journal of Enterprise Technologies*, vol. 3, issue 9 (88), 2017, pp. 53–59.
- [5] B. Pospelov, E. Rybka, R. Meleshchenko, S. Gornostal, and S. Shcherbak, "Results of experimental research into correlations between hazardous factors of ignition of materials in premises," *Eastern-European Journal of Enterprise Technologies*, vol. 6, issue 10 (90), 2017, pp. 50–56.
- [6] A. Teslenko, A. Chernukha, O. Bezuglov, O. Bogatov, E. Kunitsa, V. Kalyna, A. Katunin, V. Kobzin, and S. Minka, "Construction of an algorithm for building regions of questionable decisions for devices containing gases in a linear multidimensional space of hazardous factors," *Eastern-European Journal of Enterprise Technologies*, vol. 5, No. 10–101, 2019, pp. 42–49.
- [7] M. Kustov, V. Kalugin, O. Hristich, Yu. Hapon. "Recovery method for emergency situations with hazardous substances emission into the atmosphere," *International Journal of Safety and Security Engineering* this link is disabled, 2021, vol. 11(4), pp. 419–426.
- [8] M. Kustov, V. Kalugin, V. Tutunik, and E. Tarakhno, "Physicochemical principles of the technology of modified pyrotechnic compositions to reduce the chemical pollution of the atmosphere," *Voprosy khimii i khimicheskoi tekhnologii*, No. 1, 2019, pp. 92–99.
- [9] A. Vasyukov, V. Loboichenko, and S. Bushtec, "Identification of bottled natural waters by using direct conductometry," *Ecology, Environment and Conservation*, vol. 22, No. 3, 2016, pp. 1171–1176.
- [10] V. Loboichenko, V. Strelets, N. Leonova, A. Malko, and O. Llyynskiy, "Comparative analysis of anthropogenic impact on surface waters in Kharkiv region," *Indian Journal of Environmental Protection*, vol. 40, No. 2, 2020, pp. 134–139.
- [11] B. Pospelov, V. Kovrehin, E. Rybka, O. Krainiukov, O. Petukhova, T. Butenko, P. Borodych, I. Morozov, O. Horbov, and I. Hrachova, "Development of a method for detecting dangerous states of polluted atmospheric air based on the current recurrence of the combined risk," *Eastern-European Journal of Enterprise Technologies*, vol. 5, No. 9–107, 2020, pp. 49–56.
- [12] NPAOP 40.1-1.32-01 "Rules for the construction of electrical installations. Electrical equipment of special installations." Kyiv: Ukrarkhbudinform, 2001. 117 c. (In Ukraine).
- [13] Rules for the arrangement of electrical installations. Kyiv: Ministry of Energy and Coal of Ukraine, 2017. 617 c. (In Ukraine).
- [14] B. Pospelov, V. Andronov, E. Rybka, R. Meleshchenko, and S. Gornostal, "Analysis of correlation dimensionality of the state of a gas medium at early ignition of materials," *Eastern-European Journal of Enterprise Technologies*, vol. 5/10 (95), 2018, pp. 25–30.
- [15] IEC 60079-10-1:2020 "Explosive atmospheres – Part 10-1: Classification of areas – Explosive gas atmospheres." Geneva: IEC Publ., 2020.
- [16] IEC 60079-10-2:2015 "Explosive atmospheres – Part 10-2: Classification of areas – Explosive dust atmospheres." Geneva: IEC Publ., 2015.
- [17] R. Tommasini, E. Pons, and F. Palamara, "Area classification for explosive atmospheres: Comparison between European and North American approaches," *Industry Applications Society 60th Annual Petroleum and Chemical Industry Conference*, Chicago. IL. USA. 2013, pp. 1–7.
- [18] B. Pospelov, R. Meleshchenko, O. Krainiukov, K. Karpets, O. Petukhova, Y. Bezuhla, T. Butenko, V. Horinova, P. Borodych, and E. Kochanov, "A method for preventing the emergency resulting from fires in the premises through operative control over a gas medium," *Eastern-European Journal of Enterprise Technologies*, vol. 10–103, 2020, pp. 6–13.
- [19] IEC 60364-1:2005 "Low-voltage electrical installations – Part 1: Fundamental principles, assessment of general characteristics, definitions." Geneva: IEC Publ., 2005.
- [20] Xiang Zheng, Huifang Wang, Kuan Jiang, and Benteng He "A Novel Machine Learning-Based Short-Circuit Current Prediction Method for Active Distribution Networks." *Energies*, 12, 2019, 3793.
- [21] N. Ding, C. Benoit, G. Foggia, Y. Bésanger, and F. Wurtz, "Neural network-based model design for short-term load forecast in distribution systems." *IEEE Trans. Power Syst*, 31, 2015, pp.72–81.
- [22] Moghadam, and Modir Shanehchi, "New short circuit calculations method for distribution networks," *8th International Power System Conference, Tehran, 2017, 1372*.
- [23] DSTU 8828: 2019 "Fire safety. Terms." Kyiv: UkrNDNC, 2019. (In Ukraine).
- [24] V. Andronov, B. Pospelov, E. Rybka, and S. Skliarov, "Examining the learning fire detectors under real conditions of application," *Eastern-European Journal of Enterprise Technologies*, vol. 3, issue 9 (87), 2017, pp. 53–59.
- [25] V. Andronov, B. Pospelov, and E. Rybka, "Increase of accuracy of definition of temperature by sensors of fire alarms in real conditions of fire on objects," *Eastern-European Journal of Enterprise Technologies*, vol. 4, issue (5–82), 2016, pp. 38–44.
- [26] B. Pospelov, E. Rybka, O. Krainiukov, O. Yashchenko, Y. Bezuhla, S. Bielai, E. Kochanov, S. Hryshko, E. Poltavski, and O. Nepsha, "Short-term forecast of fire in the premises based on modification of the Brown's zero-order model," *Eastern-European Journal of Enterprise Technologies*, vol. 4/10 (112), 2021, pp. 52–58.
- [27] IEC 60079-14:2013 "Explosive atmospheres – Part 14: Electrical installations design, selection and erection." Geneva: IEC Publ., 2013.
- [28] IEC 60947-2:2016 "Low-voltage switchgear and controlgear – Part 2: Circuit-breakers." Geneva: IEC Publ., 2016.
- [29] IEC 60269-1:2006 "Low-voltage fuses - Part 1: General requirements." Geneva: IEC Publ., 2016.
- [30] EN 50160:2010 "Voltage characteristics of electricity supplied by public electricity networks." Brussel: Cenelek Publ., 2010.
- [31] DSTU 2105-92 "Power oil transformers for general purposes up to 35 kV. Specifications." Kyiv: State Standard of Ukraine, 1992. (In Ukraine).
- [32] IEC 60228:2004 "Conductors of insulated cables." Geneva: IEC Publ., 2004.